


EXTREME FLEX HOSE

HOSE PART NO.	HOSE CONDUCTIVE PART #	HOSE SIZE	AVERAGE I.D. IN.	OPERATING PRESSURE IN.	BURST PRESSURE IN.	BEND RADIUS IN.
EXMP-04	EXMPC-04	1/4	0.187	3,000	12,000	1.5
EXMP-06	EXMPC-06	3/8	0.312	2,500	10,000	2.0
EXMP-08	EXMPC-08	1/2	0.405	2,000	8,000	3.0
EXMP-10	EXMPC-10	5/8	0.500	1,500	6,000	3.0
EXMP-12	EXMPC-12	3/4	0.625	1,200	4,800	3.5
EXMP-16	EXMPC-16	1	0.875	1,000	4,000	6.0

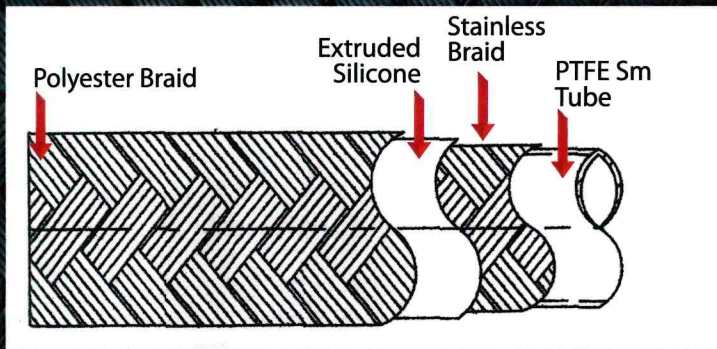

Designed and developed for the most severe application where PTFE Smooth tube is best suited. The unique and proprietary multi-layer construction results in an extremely flexible and durable smooth bore product in the industry.

Construction

- PTFE Conductive Smooth Tube
- Stainless Steel Braid
- Extruded Silicone Cover
- (TP) Polyester Braid
- Increased Cycle Life
- Rated up to 500° F

ISO 9001:2015



ALL HOSE INC.

341 SHAKER ROAD • EAST LONGMEADOW, MA 01028

413.224.2102 • toll-free: 866.806.7720 • fax: 413.224.2105

www.allhose-inc.com • all.hose.sales@gmail.com